

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau




(43) International Publication Date
10 May 2002 (10.05.2002)

PCT

(10) International Publication Number
WO 02/36485 A1

- (51) International Patent Classification⁷: **B81B 3/00**, (74) Agent: **WIDÉN, Björn**; Biacore AB, Rapskatan 7, S-754 50 Uppsala (SE).
- (21) International Application Number: **PCT/SE01/02406** (81) Designated States (national): **AU, JP, US.**
- (22) International Filing Date:
1 November 2001 (01.11.2001) (84) Designated States (regional): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR).
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
60/245,865 2 November 2000 (02.11.2000) US
- (71) Applicant (for all designated States except US): **BIA-CORE AB** [SE/SE]; Rapskatan 7, S-751 50 Uppsala (SE).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **HANSSON, Thord** [SE/SE]; Kilkällan, S-740 22 Bälinge (SE). **SJÖLAN-DEK, Stefan** [SE/SE]; Funbo, Solbacka, S-755 97 Uppsala (SE).
- Declaration under Rule 4.17:**
— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AU, JP, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR)
- Published:**
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **VALVE INTEGRALLY ASSOCIATED WITH MICROFLUIDIC LIQUID TRANSPORT ASSEMBLY**

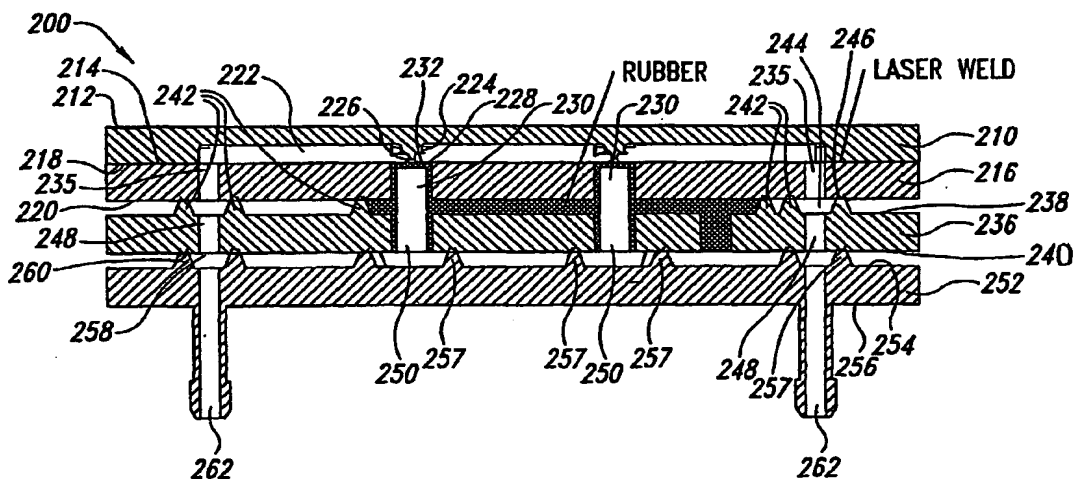

(57) Abstract: A valve integrally associated with a microfluidic transport assembly useful for regulating the flow of a liquid sample through an analytical instrument, and method for manufacturing the same are disclosed. The valve includes first and second substantially planar and integrally bonded rigid layers (210, 216), and a liquid passageway (222) defined by a groove along a surface (214) of the first layer (210) and the opposed surface (218) of the second layer (216). A valve seat (224) within the passageway (222) and integrally connected to the first layer (210) has a plateau surface (226) opposite a flexible membrane (228) integrally associated with a hole (230) through the second layer (216). When the valve is open, the membrane (228) is substantially coplanar to the surface (214) of the first layer (210), and when closed, the membrane is bulged to be substantially coplanar to the plateau surface (226) of the valve seat.

VALVE INTEGRALLY ASSOCIATED WITH MICROFLUIDIC LIQUID TRANSPORT ASSEMBLY

TECHNICAL FIELD

The present invention relates to valves associated with microfluidic
5 assemblies, and more specifically, to valves integrally associated with microfluidic
assemblies adapted to transport liquid samples for analytical purposes.

BACKGROUND OF THE INVENTION

A variety of analytical instruments are used to characterize liquid
samples containing an analyte of interest, particularly in the context of assays directed to
10 real-time detection of biomolecular interactions. For example, the study of real-time
biomolecular interactions through use of "biosensors" are now of fundamental
importance in many fields, including biology, immunology and pharmacology. In this
context, many biosensor-based analytical instruments include "microfluidic structures"
adapted to transport one or more liquid samples through an interaction or a detection
15 zone. Such microfluidic structures generally include a block unit that has multiple
internal channels, inlet and outlet ports, pumps and valves; all of which operate in
concert to flow small volumes of liquid sample and various other buffers and reagents
through one or more interaction and/or detection zones.

An exemplary microfluidic structure for such liquid handling may be
20 illustrated in the context of biosensors that use surface plasmon resonance (SPR) to
monitor the interactions between an analyte and a ligand bound to a solid support. In
this regard, a representative class of biosensor instrumentation is sold by Biacore AB
(Uppsala, Sweden) under the trade name BIAcore® (hereinafter referred to as "the
BIAcore instrument"). The BIAcore instrument includes a light emitting diode, a sensor
25 chip covered with a thin gold film, an integrated microfluidic cartridge and photo
detector. Incoming light from the diode is reflected in the gold film and detected by the
photo detector. At a certain angle of incidence ("the SPR angle"), a surface plasmon
wave is set up in the gold layer, which is detected as an intensity loss or "dip" in the
reflected light. The theoretical basis behind the BIAcore instrument has been fully
30 described in the literature (*see, e.g., Jönsson, U. et al., Biotechniques 11:620-627, 1991*).

More specifically, and as best shown in Figure 1 (prior art), a representative BIAcore instrument 100 comprises a source of light 102, first lens means 104 for directing a transversely extending convergent beam 106 toward a prism 108 whereby the beam is focused in the bottom surface of the prism 108 to thus form a streak 110 of light. Rays of light reflected from the sensitized surfaces are imaged via an anamorphic lens system 112 on a two-dimensional photodetector device 114. The electronic signals created by the photodetectors are processed in an evaluation device 116 in the form of a computer.

By means of the prism 108 and an opto-interface 118 light from streak 110 is directed to a sensor unit 120 which lies in contact with a number of parallel, upwardly open portions 122A-D of flow channels 124A-D, respectively; only one of which, 124A, is shown. The flow channels form part of a block unit 126 for liquid handling, this block unit is shown with schematically indicated inlet connection tubes 128 and 130 and outlet connection tubes 132 and 134. A more complete description of this representative BIAcore instrument including its microfluidic block unit for flowing solutions therein may be found in U.S. Patent No. 5,313,264, which is incorporated herein by reference in its entirety.

As more fully described in U.S. Patent No. 5,313,264, and as also best seen in Figure 1 (prior art), the upwardly open portions 122A-D of flow channels 124A-D (only flow channel 124A is shown) correspond to a first layer 136 of a sealing elastomer material (*e.g.*, silicone rubber or the like) that has a number of cuts or slits extending therethrough. The first layer 136 has been cast onto a plateau 138 which is integral with a base plate 140. The base plate 140 is preferably a solid member made of, for example, plastic, metal, ceramics, or the like.

As best seen in corresponding Figures 1A and 1B, a second layer 142 of an elastomer material (*e.g.*, silicone rubber or the like) has been applied by, for example, casting to the underside of base plate 140. The second layer 142 is provided with a system of flow channels or conduits formed by casting. A third layer 144, preferably of the same material as that of second layer 142, has been cast onto a support plate 146 made of a solid material (preferably made of the same material as that of base plate 140).

In view of the foregoing description, it will be readily understood that when the BIAcore instrument 100 is in an operable configuration such that the sensor unit 120 is pressed against first layer 136 by the opto-interface 118, the upwardly open portions 122A-D in first layer 136 will be sealed in liquid-tight relationship against sensor unit 120 and form four flow cells. For sake of simplicity, these four flow cells are also designated 122A-D.

Moreover, in operation, a liquid sample is made to flow through one or more of the flow cells 122A-D. More specifically, a pump (not shown) pumps the liquid sample to inlet tube 128, through an inlet channel 148, through an open valve 150, and then through a primary channel 152 having a fixed and well-defined volume, until it reaches a closed valve 154. The closed valve 154 directs the liquid sample into a waste channel 156 communicating via outlet connecting tube 134 with a disposal receptacle 158.

Next, a valve (not shown) at the upstream end of waste channel 156 is closed, and at the same time valve 150 is also closed. The liquid sample in the primary volume is now ready to be pumped into the flow cell 122A. This is done with the aid of an eluent solution 160 which is pumped by a pump 162 through inlet tube 130 to an eluent conduit 164 ending in a valve (not shown) which is now opened together with valve 154. Continued pumping of the eluent solution 160 causes the advancing eluent solution to press forward against the primary volume of the liquid sample and force it to advance upwardly through a riser duct 166 in the plateau 138, and then into flow cell 122A, and then down through a second riser duct 168 and out through an exhaust duct 170 and outlet tube 132. From the outlet tube 132, the sample liquid followed by the eluent solution is directed to a waste disposal receptacle 172. When the sample liquid, which has a predetermined volume and/or flow rate, is flowing along flow cell 122A, the chemical interaction between the sample liquid and the sensing surface of the sensor unit 120 is optically detected and analyzed.

One aspect associated with the above-described microfluidic structure, however, lies with the second elastomeric layer 142 (Figures 1A and 1B), which elastomeric layer forms part of the valves. In general, the elastomeric layer has low chemical resistance, and may have high permeability with respect to certain gases and small molecules. Both of these attributes are less than optimal in certain embodiments.

Accordingly, there is a need in the art for improved microfluidic structures adapted to transport liquid samples for analytical purposes. The present invention fulfills these needs, and provides for further related advantages.

SUMMARY OF THE INVENTION

5 The present invention discloses a valve integrally associated with a microfluidic transport assembly that is useful for regulating the flow of a liquid sample through an analytical instrument such as, for example, a biosensor. The valve integrally associated with a microfluidic liquid transport assembly includes: a first rigid layer having substantially planar and opposing first and second surfaces; a second rigid layer
10 having substantially planar and opposing third and fourth surfaces, the third surface of the second rigid layer being substantially coplanar and integrally bonded to the second surface of the first rigid layer; a first passageway defined by a groove, the groove being along the second surface of the first rigid layer and bounded by the third surface of the second rigid layer, the first passageway being adapted to flow a liquid sample
15 therethrough, a valve seat having a substantially planar plateau surface, the valve seat being within the passageway and integrally connected to the first rigid layer such that the plateau surface is substantially planar to and interposed between the first and second surfaces of the first rigid layer; and a flexible membrane opposite the valve seat and integrally associated with a first membrane through hole of the second rigid layer, the
20 flexible membrane having a passageway surface that is either (i) substantially coplanar to the second surface of the first rigid layer when the valve is in an open position, or (ii) bulged with a central portion thereof being substantially coplanar to the plateau surface of the valve seat when the valve is in a closed position. The present invention is also directed to methods of manufacturing of the same.

25 BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 illustrates a schematic exploded view of a representative optical biosensor in accordance with the prior art.

Figure 1A illustrates a partial cross-sectional view of Figure 1 showing a valve in its open position.

Figure 1B illustrates a corresponding cross-sectional alternative view showing the valve in its closed position.

Figure 2 illustrates a front elevational view of a microfluidic assembly in accordance with the present invention.

5 Figure 3 illustrates a side elevational view of the microfluidic assembly shown in Figure 2.

Figure 4 illustrates a cross-sectional view of the microfluidic assembly shown in Figure 2 taken along line 4-4.

10 Figure 5 illustrates an exploded isometric view of several plates that make up a microfluidic assembly in accordance with the present invention, and which are shown together with an exploded isometric view of a mold suitable for injecting an elastomeric material that forms a valve integrally associated with the microfluidic assembly .

Figure 6 is an enlarged view of the valve seat shown in Figure 5.

15 Figures 7A-C depict front, side, and back elevational views of a first plate associated with a microfluidic assembly in accordance with the present invention.

Figures 8A-C depict front, side, and back elevational views of a second plate associated with a microfluidic assembly in accordance with the present invention.

20 Figures 9A-C depict front, side, and back elevational views of a third plate associated with a microfluidic assembly in accordance with the present invention.

Figures 10A-C depicts an elevational views of a fourth plate associated with a microfluidic assembly in accordance with the present invention.

DETAILED DESCRIPTION OF THE INVENTION

25 As mentioned above, the present invention relates to valves associated with microfluidic assemblies, and more specifically, to valves integrally associated with microfluidic assemblies adapted to transport liquid samples for analytical purposes. Although many specific details of certain embodiments of the invention are set forth in the following detailed description and accompanying Figures, those skilled in the art will recognize that the present invention may have additional embodiments, or that the
30 invention may be practiced without several of the details described herein.

In the several embodiments set forth below, the inventive valves of this invention are integrally associated with microfluidic liquid transport assemblies, such as, for example, those adapted for use with "biosensors." As is appreciated by those skilled in the art, biosensors are analytical devices for analyzing minute quantities of sample solution having an analyte of interest, wherein the analyte is analyzed by a detection device that may employ a variety of detection methods. Typically, such methods include, but are not limited to, mass detection methods, such as piezoelectric, optical, thermo-optical and surface acoustic wave (SAW) device methods, and electrochemical methods, such as potentiometric, conductometric, amperometric and capacitance methods. With regard to optical detection methods, representative methods include those that detect mass surface concentration, such as reflection-optical methods, including both internal and external reflection methods, angle, wavelength or phase resolved, for example ellipsometry and evanescent wave spectroscopy (EWS), the latter including surface plasmon resonance (SPR) spectroscopy, Brewster angle refractometry, critical angle refractometry, frustrated total reflection (FTR), evanescent wave ellipsometry, scattered total internal reflection (STIR), optical wave guide sensors, evanescent wave-based imaging, such as critical angle resolved imaging, Brewster angle resolved imaging, SPR angle resolved imaging, and the like. Further, photometric methods based on, for example, evanescent fluorescence (TIRF) and phosphorescence may also be employed, as well as waveguide interferometers. One exemplary biosensor is disclosed in U.S. Patent No. 5,313,264 (assigned to Biacore AB, Uppsala, Sweden), which is incorporated herein by reference in its entirety.

In one embodiment of the present invention, and as best seen in Figures 2-4, a valve integrally associated with a microfluidic liquid transport assembly 200 includes a first rigid layer 210 having substantially planar and opposing first and second surfaces, 212 and 214, respectively, and a second rigid layer 216 having substantially planar and opposing third and fourth surfaces, 218 and 220, respectively. As shown in Figure 4, the third surface 218 of the second rigid layer 216 is substantially coplanar and integrally bonded to the second surface 214 of the first rigid layer 210. As further shown in Figure 4, the valve integrally associated with the microfluidic liquid transport assembly 200 further includes a first passageway 222 that is defined by a groove positioned along the second surface 214 of the first rigid layer 210 and bounded by the

third surface 218 of the second rigid layer 216; the groove is defined by two opposing walls and a floor. A characteristic of this first passageway 222 is that it is adapted to flow a liquid sample therethrough.

Within the first passageway 222 and integrally connected to the first rigid layer 210, is a valve seat 224 that has a substantially planar plateau surface 226. The plateau surface 226 is substantially planar to and interposed between the first and second surfaces 212, 214. As shown in Figure 4, the valve seat protrudes from the floor of the groove. A flexible membrane 228 is positioned opposite the valve seat 224; the flexible membrane 228 is integrally associated with one or more first flexible membrane through holes 230 of the second rigid layer 216. A characteristic of this flexible membrane 228 is that it has a passageway surface 232 that is either (i) substantially coplanar to the second surface of the first rigid layer when the valve is in an open position, or (ii) bulged with a central portion thereof being substantially coplanar to the plateau surface 226 of the valve seat 224 when the valve is in a closed position.

In further embodiments and as also shown in Figure 4, the valve integrally associated with the microfluidic transport assembly 200 includes a plurality of first through holes 235 positioned such that they communicate with the first passageway 222. In still further embodiments, the valve integrally associated with the microfluidic transport assembly 200 includes a third rigid layer 236 that has substantially planar and opposing fifth and sixth surfaces, 238 and 240, respectively. The fifth surface 238 has a plurality of ridges 242 protruding therefrom, wherein the plurality of ridges 242 defines a second passageway 244 that is also adapted to flow a liquid sample therethrough. In addition, the plurality of ridges 242 also defines a top ridge surface 246 that is substantially coplanar and integrally bonded to the fourth surface 220 of the second rigid layer 216. The shape of the top ridge surface may vary depending on the method used for bonding the rigid layers together, e.g. planar, bulged, pointed, etc.

The third rigid layer 236, similar to the second rigid layer 216, includes a plurality of second through holes 248 positioned such that they communicate with the second passageway 244. As shown in Figure 4, the third rigid layer 236 also includes one or more second flexible membrane through holes 250 that communicate with the flexible membrane 230 of the second rigid layer 216. The one or more second flexible

membrane through holes 250 each have an additional amount of the flexible membrane 228 coextensively disposed about its respective wall.

In still further embodiments, the valve integrally associated with the microfluidic transport assembly 200 includes a fourth rigid layer 252 that has substantially planar and opposing seventh and eighth surfaces, 254 and 256, respectively. The seventh surface 254 has a plurality of second ridges 257 protruding therefrom, wherein the plurality of second ridges 257 defines a third passageway 258 that is also adapted to flow a liquid sample therethrough. In addition, the plurality of second ridges 257 also defines a top ridge surface 260 that is substantially coplanar and integrally bonded to the sixth surface 240 of the third rigid layer 236. The fourth rigid layer 252, similar to the second and third rigid layers 216, 236, includes a plurality of third through holes 262 positioned such that they communicate with the first, second, and third passageways, 222, 244, 258.

The component parts associated with the microfluidic transport assembly of the present invention may be processed and assembled together as set forth in the below-described exemplary manufacturing techniques, wherein the component parts and their associated features have dimensions as set forth below in Table 1.

Table 1

REPRESENTATIVE DIMENSIONS OF THE COMPONENT PARTS

Flow channels in plate #4:	0.3 x 0.2 mm
Flow cell in plate #4:	0.5 x 0.05 mm
Riser ducts:	0.3 mm
Distance from valve seat to membrane surface:	0.05 mm
Membrane valve outer diam.:	0.6 mm
Membrane valve inner diam.:	0.5 mm
Elastomer conduits between plate #1 and #2:	0.7 x 0.4 mm
Pressure conduits between plate #2 and #3:	0.7 x 0.4 mm
Plate thickness :	1-2 mm
Ridges on plate #2 and #3 height:	0.6 mm

With regards to the exemplary manufacturing techniques, reference is also made to Figures 5 and 6, wherein Figure 5 illustrates an exploded isometric view of several plates (*i.e.*, plates 1-4) that make up a microfluidic assembly in accordance with the present invention, and which are shown together with an exploded isometric view of a two-part mold suitable for injecting/casting an elastomeric material that forms a valve integrally associated with the microfluidic assembly, and wherein Figure 6 is an enlarged view of the valve seat shown in Figure 5. Reference is also made to Figures 7A-C through Figures 10A-C, which Figures depict front, side, and back elevational views of the four plates (which plates constitute the above-described four rigid layers).

More specifically, a first flat plastic plate (shown as plate #1 in Figure 5 and in Figures 7A-C, which plate #1 corresponds to the above-described second rigid layer) is plasma processed on one side so as to enhance bonding or adhesion of a later added flexible membrane such as, for example, a flexible membrane made of a silicone rubber or a thermoplastic elastomer (TPE). In general, the first flat plastic plate is preferably made with an IR-absorbing plastic material such as, for example, a polycarbonate tinted with carbon black. Thus, it is to be understood that the term "flexible" as used within the context of the present invention is to be construed broadly in that it denotes a membrane having pliable or elastomeric qualities. Similarly, the term "rigid" as used within the context of the present invention denotes a layer that is relatively stiff and unyielding.

Concomitantly, a second flat plastic plate (shown as plate #2 in Figure 5 and in Figures 8A-C, which plate #2 corresponds to the above-described third rigid layer) having generally the same hole pattern as that of the first flat plastic plate, and having a plurality of protruding ridges on one side that defines a planar top ridge surface, is connected together with the first flat plastic plate. That is, the plasma processed side of the first plate is connected together with the planar top ridge surface of the second plate such that each plate's respective hole patterns are in substantial axial alignment with each other. In general, the second flat plastic plate is preferably made with a non-IR-absorbing plastic material such as, for example, a polycarbonate.

The first and second plastic plates may be connected together by any of a number of suitable bonding techniques such as, for example, gluing or by an ultrasonic or laser welding technique. As is appreciated by those skilled in the art, laser welding

offers significant advantages over conventional joining technologies; it is especially well suited for joining plastic materials having different optical absorptions at the laser wavelength. The laser light may penetrate the transparent component (*e.g.*, plate #1) and is then absorbed by the non-transparent component (*e.g.*, plate #2) where it is converted into heat. The first and second plastic plates melt at the interface and welding may be effected by external pressure applied by a workholding fixture. In this manner, a welded unit (also referred to as a membrane plate) inclusive of the first and second flat plastic plates (*i.e.*, second and third rigid layers, respectively) may be formed.

The formed welded unit may then be placed in a mold that consists of two halves (shown in Figure 5 as mould half A and mould half B) to facilitate formation of an internal flexible membrane that defines part of the valve. More specifically, the welded unit may be placed in the two-part mold, wherein mould half A has a smooth mold surface and mould half B has a smooth mold surface with one or more perpendicularly protruding cylinders that are adapted to concentrically fit within the flexible membrane through holes associated with plate #1 and plate #2. In general, the protruding cylinders have flat top surfaces, are preferably about 0.1 mm shorter than the thickness of the welded unit, and have diameters that are preferably about 0.1 less than the diameters of the flexible membrane through holes. A silicone rubber (preferably having Shore A hardness of between 24-29) or a thermoplastic elastomer (TPE) in liquid form may then be injected through a funnel associated with mould half B so as to form via casting the internal flexible membrane. As is appreciated by those skilled in the art, casting is the process whereby a liquid is poured into a mold and allowed to react, cure, or harden to form a solid object in the shape of the mold cavity. Moreover, it is to be understood that suitable thermoplastic elastomers for purposes of the present invention include a thermoplastic polyurethane elastomer (*i.e.*, TPU), a polyolefin-based thermoplastic elastomer (*i.e.*, TPO), a thermoplastic elastomer based on dynamically vulcanized elastomer-thermoplastic blends (*i.e.*, TPV), a styrene block thermoplastic elastomer, a thermoplastic polyether ester elastomer, a thermoplastic elastomer based on halogen-containing polyolefins, and a thermoplastic elastomer based on polyamides, as well as various combinations and blends thereof.

After solidification of the silicone rubber or suitable thermoplastic elastomer (TPE), the welded unit may then be removed from the mold, and any burrs

that exist may be eliminated. A third flat plastic plate having a channel pattern of ridges leading to each membrane valve (shown as plate #3 in Figure 5 and in Figures 9A-C, which plate corresponds to the above-described fourth rigid layer) may then be connected together with the welded unit to form a three-plate assemblage referred to as the valve plate. Next, a fourth plastic plate having a channel pattern of grooves with valves seats (shown as plate #4 in Figure 5 and in Figures 10A-C, which plate corresponds to the above-described first rigid layer) may then be connected together with the valve plate to form the valve integrally associated with the microfluidic transport structure in accordance with the present invention by a suitable bonding technique, such as, for example, gluing or by an ultrasonic or laser welding technique.

By this exemplary method, a valve integrally associated with a microfluidic transport structure assembly may be manufactured that overcomes many of the drawbacks associated with prior art microfluidic structures. In particular, the surface area of the elastomeric layer that comes into contact with the liquid sample may now be minimized, thereby reducing adverse chemical interactions that may occur between the liquid sample and the elastomeric layer. Other advantages include a more streamlined manufacturing process.

While the valves integrally associated with microfluidic transport assemblies of the present invention and their representative manufacturing techniques have been described in the context of the embodiments illustrated and described herein, the invention may be embodied in other specific ways or in other specific forms without departing from its spirit or essential characteristics. Therefore, the described embodiments are to be considered in all respects as illustrative and not restrictive. The scope of the invention is, therefore, indicated by the appended claims rather than by the foregoing description, and all changes that come within the meaning and range of equivalency of the claims are to be embraced within their scope.

CLAIMS

1. A valve integrally associated with a microfluidic liquid transport assembly, comprising:

5 a first rigid layer (210) having substantially planar and opposing first and second surfaces (212, 214);

a second rigid layer (216) having substantially planar and opposing third and fourth surfaces (218, 220), the third surface (218) of the second rigid layer (216) being substantially coplanar and integrally bonded to the second surface (214) of the first rigid layer (210);

10 a first passageway (222) defined by a groove, the groove being along the second surface (214) of the first rigid layer (210) and bounded by the third surface (218) of the second rigid layer (216), the first passageway (222) being adapted to flow a liquid sample therethrough,

15 a valve seat (224) having a substantially planar plateau surface (226), the valve seat (224) being within the first passageway (222) and integrally connected to the first rigid layer (210) such that the plateau surface (226) is substantially planar to and interposed between the first and second surfaces (212, 214) of the first rigid layer (210); and

20 a flexible membrane (228) opposite the valve seat (224) and integrally associated with a first membrane through hole (230) of the second rigid layer (216), the flexible membrane (228) having a passageway surface (232) that is either (i) substantially coplanar to the second surface (214) of the first rigid layer (210) when the valve is in an open position, or (ii) bulged with a central portion thereof being

25 substantially coplanar to the plateau surface (226) of the valve seat (224) when the valve is in a closed position.

2. The valve integrally associated with the microfluidic transport assembly of claim 1, wherein the microfluidic transport assembly is adapted to flow the liquid sample in a biosensor.

3. The valve integrally associated with the microfluidic transport assembly of claim 1 or 2, wherein the first and second rigid layers (210, 216) are each made from one or more plastic materials.

4. The valve integrally associated with the microfluidic transport assembly of claim 1, 2 or 3, wherein the first and second rigid layers (210, 216) are each made of the same plastic material.

5. The valve integrally associated with the microfluidic transport assembly of claim 4, wherein the plastic material is a polycarbonate.

6. The valve integrally associated with the microfluidic transport assembly of any one of claims 1 to 5, wherein the first and second rigid layers (210, 216) are integrally bonded together by a laser weld.

7. The valve integrally associated with the microfluidic transport assembly of any one of claims 1 to 6, wherein the first and second rigid layers (210, 216) have a combined thickness ranging from about 1 to about 2 millimeters.

8. The valve integrally associated with the microfluidic transport assembly of any one of claims 1 to 7, wherein the groove (222) is defined by two opposing sidewalls and a floor.

9. The valve integrally associated with the microfluidic transport assembly of claim 8, wherein the valve seat (224) protrudes from the floor of the groove.

10. The valve integrally associated with the microfluidic transport assembly of any one of claims 1 to 9, wherein the flexible membrane (228) is a silicone rubber.

11. The valve integrally associated with the microfluidic transport assembly of any one of claims 1 to 9, wherein the flexible membrane (228) is a thermoplastic elastomer.

12. The valve integrally associated with the microfluidic transport assembly of any one of claims 1 to 11, wherein the second rigid layer (216) includes a plurality of first through holes (235) that communicate with the first passageway (222).

13. The valve integrally associated with the microfluidic transport assembly of any one of claims 1 to 12, further comprising a third rigid layer (236) having substantially planar and opposing fifth and sixth surfaces, (238, 240), the fifth surface (238) having a plurality of ridges (242) protruding therefrom, the plurality of ridges (242) defining a second passageway (244) adapted to flow the liquid sample therethrough and a top first ridge surface (246), the top first ridge surface (246) being substantially coplanar and integrally bonded to the fourth surface (220) of the second rigid layer (216).

14. The valve integrally associated with the microfluidic transport assembly of claim 13, wherein the third rigid layer (236) includes a plurality of second through holes (248) that communicate with the first and second passageways (222, 244).

15. The valve integrally associated with the microfluidic transport assembly of claim 14, wherein the third rigid layer (236) includes a second membrane through hole (250) that communicates with the first membrane through hole (230) of the second rigid layer (216), the at least one second membrane through hole (250) having an additional amount of the flexible membrane (228), the additional amount of the flexible membrane (228) being coextensively disposed about the walls of the one or more second through holes (250).

16. The valve integrally associated with the microfluidic transport assembly of claim 13, 14 or 15, further comprising a fourth rigid layer (252) having substantially planar and opposing seventh and eighth surfaces (254, 256), the seventh

surface having a plurality of second ridges (257) protruding therefrom, the plurality of second ridges (257) defining a third passageway (258) adapted to flow the liquid sample therethrough and a top second ridge surface (260), the top second ridge surface (260) being substantially coplanar and integrally bonded to the sixth surface (240) of the third rigid layer (236).

17. The valve integrally associated with the microfluidic transport assembly of claim 16, wherein the fourth rigid layer (252) includes a plurality of third through holes (262) that communicate with the first, second and third passageways (222, 244, 258).

18. A method for manufacturing a valve integrally associated with a microfluidic transport assembly, the method comprising the steps of:

integrally bonding a first rigid layer (210) having substantially planar and opposing first and second surfaces (212, 214) to a second rigid layer (216) having substantially planar and opposing third and fourth surfaces (218, 220), such that the third surface (218) of the second rigid layer (216) contacts the second surface (214) of the first rigid layer (210), and such that a first passageway (222) is formed wherein the first passageway (222) is defined by a groove that runs along the second surface (214) of the first rigid layer (210) and is bounded by the third surface (218) of the second rigid layer (216), and wherein the first passageway (222) is adapted to flow a liquid sample therethrough, and wherein the first passageway (222) includes a valve seat (224) that has a substantially planar plateau surface (226) wherein the valve seat (224) is integrally connected to the first rigid layer (210) such that the plateau surface (226) is substantially planar to and interposed between the first and second surfaces (212, 214) of the first rigid layer (210); and

casting a flexible membrane (228) into a first membrane through hole (230) of the second rigid layer (216) such that the flexible membrane (228) has a passageway surface (232) that is adapted to be either (i) substantially coplanar to the second surface (214) of the first rigid layer (210) when the valve is in an open position, or (ii) bulged with a central portion thereof being substantially coplanar to the plateau surface (226) of the valve seat (224) when the valve is in a closed position.

19. The method of claim 18, wherein the step of integrally bonding involves laser welding the third surface (218) of the second rigid layer (216) to the second surface (214) of the first rigid layer (210).

20. A valve integrally associated with a microfluidic liquid transport assembly, comprising:

a first means (210) for defining substantially planar and opposing first and second surfaces (212, 214);

a second means (216) for defining substantially planar and opposing third and fourth surfaces (218, 220), the third surface (218) of the second means (216) being substantially coplanar and integrally bonded to the second surface (214) of the first means (210);

a passageway means (222) for flowing a liquid sample, the passageway means (222) being along the second surface (214) of the first means (210) and bounded by the third surface (218) of the second means (216),

a valve seat means (224) for defining a substantially planar plateau surface (226), the valve seat means (224) being within the passageway means (222) and integrally connected to the first means (210) such that the plateau surface (226) is substantially planar to and interposed between the first and second surfaces (212, 214) of the first means; and

a flexible membrane means (228) for controllably flowing the liquid sample, the flexible membrane means (228) being opposite the valve seat means (224) and integrally associated with a first membrane through hole (230) of the second means (216), the flexible membrane means (228) having a passageway surface (232) that is either (i) substantially coplanar to the second surface (214) of the first means (210) when the valve is in an open position, or (ii) bulged with a central portion thereof being substantially coplanar to the plateau surface (226) of the valve seat means (224) when the valve is in a closed position.

21. The valve integrally associated with the microfluidic transport assembly of claim 20, wherein the microfluidic transport assembly is adapted to flow the liquid sample in a biosensor.

1/4



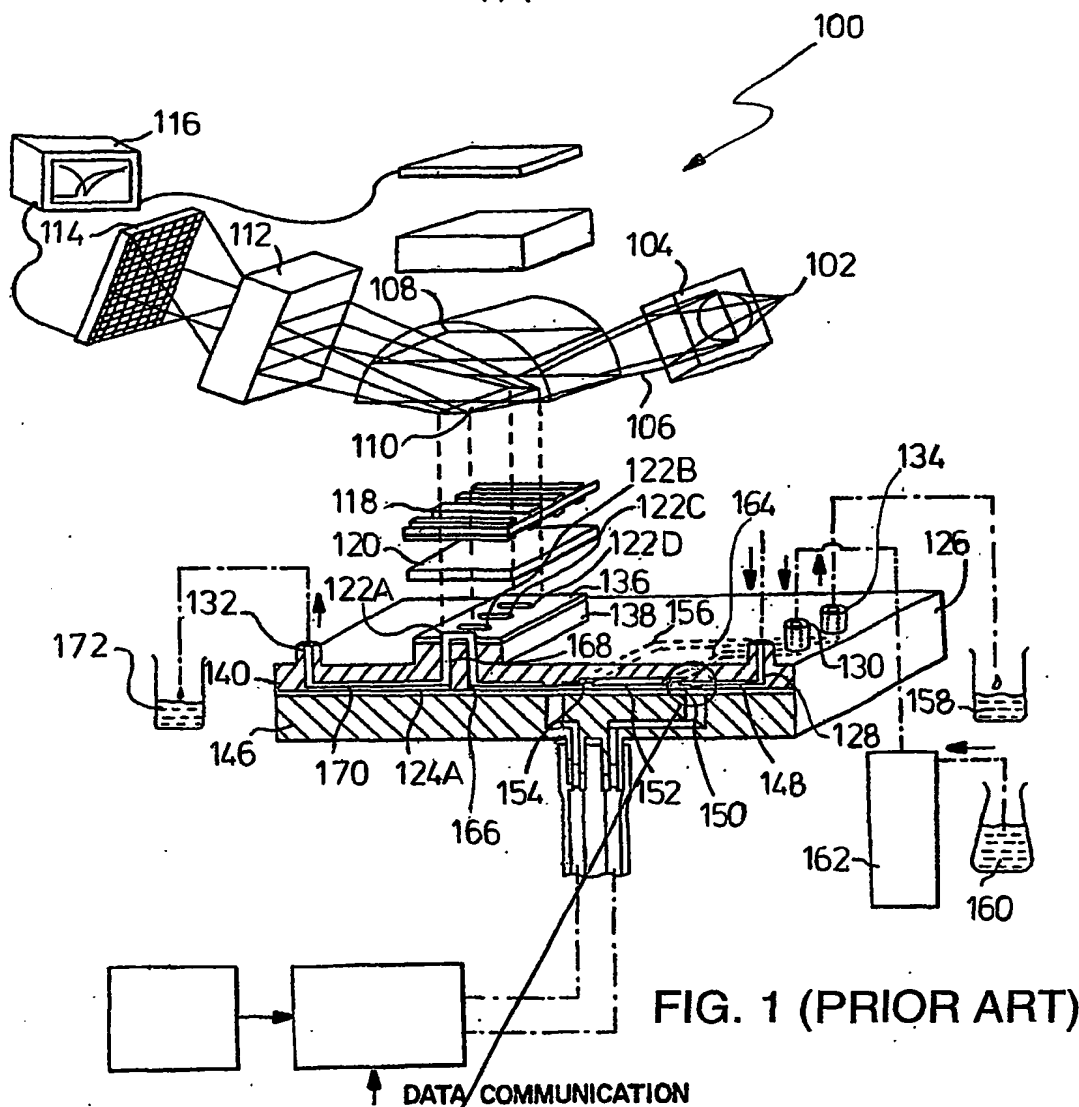


FIG. 1 A

FIG. 1 B



VALVE OPEN



VALVE CLOSED

214

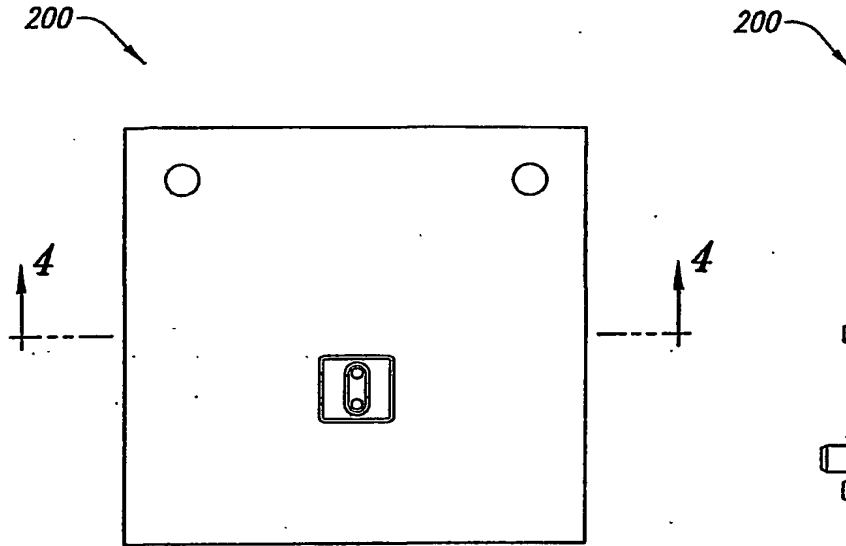


Fig. 2

Fig. 3

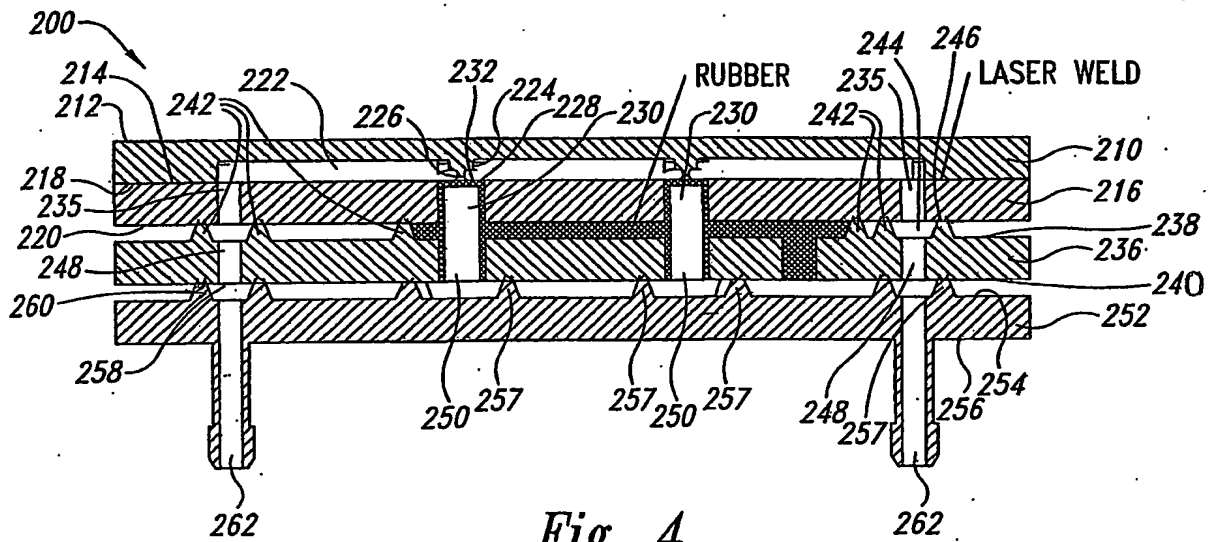


Fig. 4

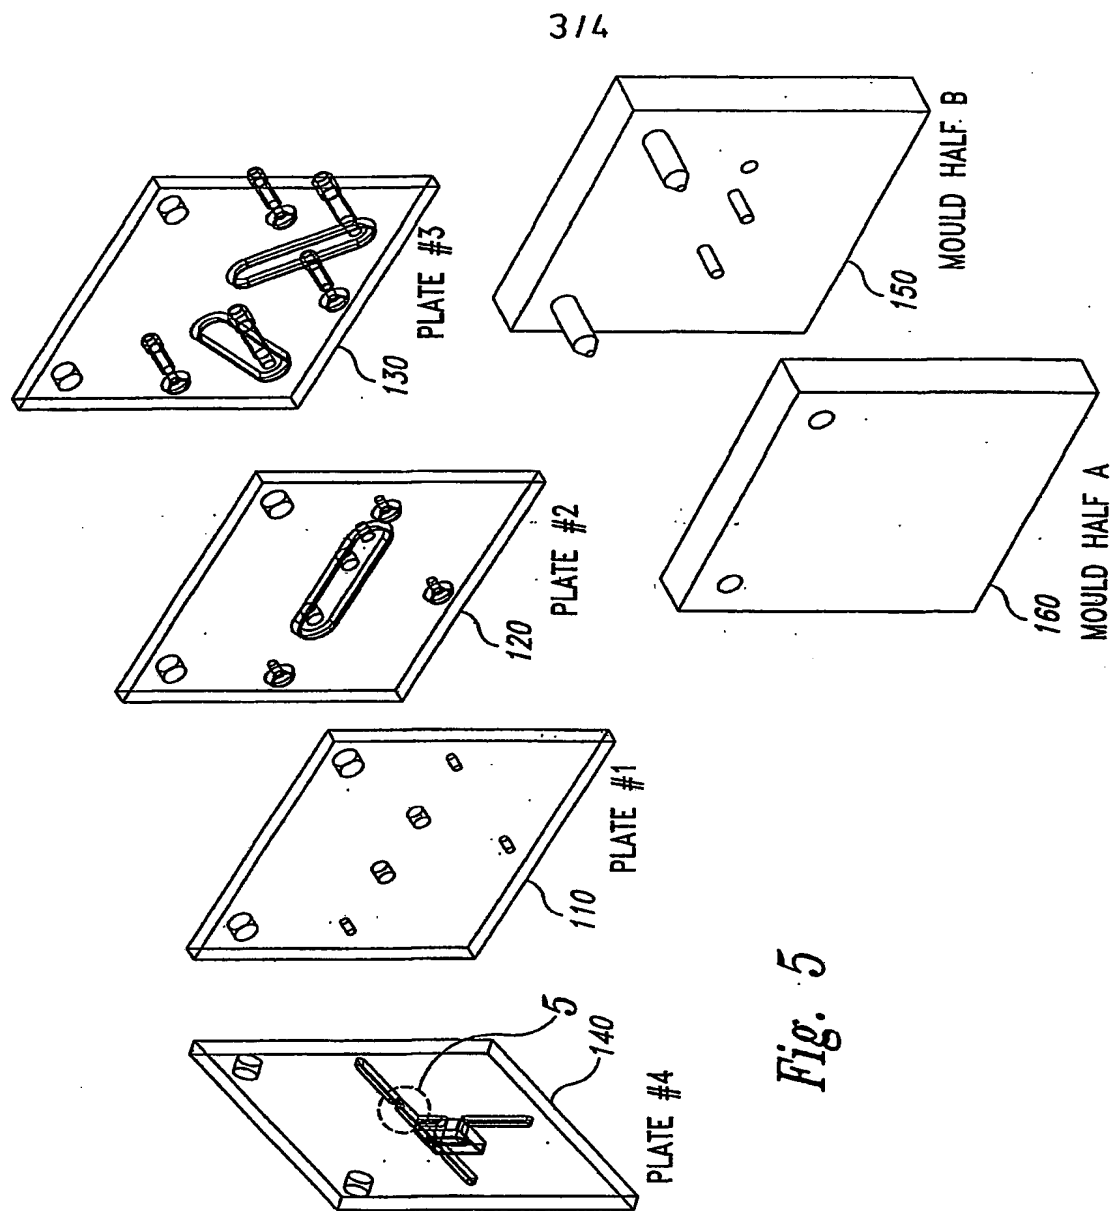


Fig. 5

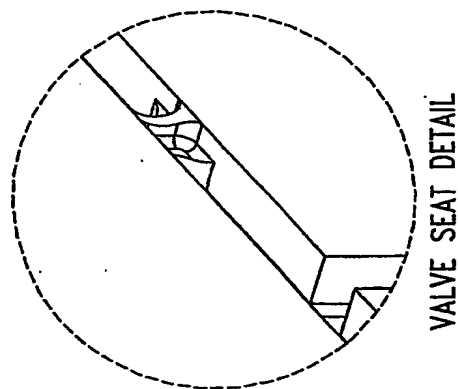


Fig. 6

4/4




Fig. 7A



Fig. 7B

PLATE #1




Fig. 7C

RUBBER INLET




Fig. 8A



Fig. 8B

PLATE #2




Fig. 8C

FLOW CELL 532




Fig. 9A



Fig. 9B

PLATE #3




Fig. 9C




Fig. 10A

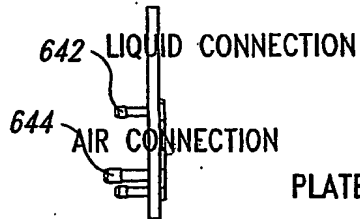


Fig. 10B

PLATE #4




Fig. 10C

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 01/02406

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: B81B 3/00 F16K 7/17

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: G01N, B81B, F16K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-INTERNAL

C. DOCUMENTS CONSIDERED 'TO BE RELEVANT'

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 4848722 A (M.E.WEBSTER), 18 July 1989 (18.07.89), column 5, line 30 - line 38, figure 2 --	1-21
Y	WO 9960397 A1 (UNIVERSITY OF WASHINGTON), 25 November 1999 (25.11.99), page 10, line 1 - line 5; page 18, line 4 - line 28 --	1-21
A	US 5593130 A (T.HANSSON ET AL), 14 January 1997 (14.01.97) --	1-21
A	EP 0314286 A1 (FORD MOTOR CO.LTD.), 3 May 1989 (03.05.89) -- -----	1-21

☐ Further documents are listed in the continuation of Box C.
 ☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"B" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"I" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

29 January 2002

Date of mailing of the international search report

18 -02- 2002

 Name and mailing address of the ISA/
 Swedish Patent Office
 Box 5055, S-102 42 STOCKHOLM
 Facsimile No. +46 8 666 02 86

Authorized officer

 Pia Eklund /itw
 Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT
Information on patent family members

27/12/02

International application No.

PCT/SE 01/02406

Patent document cited in search report			Publication date	Patent family member(s)		Publication date
US	4848722	A	18/07/89	AT	121173 T	15/04/95
				CA	1271466 A	10/07/90
				DE	3853592 D,T	30/11/95
				EP	0400016 A,B	05/12/90
				US	4852851 A	01/08/89
				US	4858883 A	22/08/89
				WO	8905417 A	15/06/89
WO	9960397	A1	25/11/99	AU	3471499 A	25/10/99
				AU	3771599 A	06/12/99
				EP	1046032 A	25/10/00
				US	6084003 A	04/07/00
				WO	9951654 A	14/10/99
US	5593130	A	14/01/97	AT	193759 T	15/06/00
				DE	69424883 D,T	05/10/00
				EP	0775277 A,B	28/05/97
				SE	0775277 T3	
				JP	9502249 T	04/03/97
				SE	501713 C	02/05/95
				SE	9302865 A	07/03/95
				WO	9507425 A	16/03/95
				EP	0671826 A	13/09/95
				JP	8065240 A	08/03/96
				SE	9400824 D	00/00/00
				US	5617235 A	01/04/97
EP	0314286	A1	03/05/89	CA	1298530 A	07/04/92
				DE	3873019 A,T	27/08/92
				US	4768751 A	06/09/88